

MLT Blown Mini Cable

ID: **PM02**




KABELOVNA Děčín Podmokly s.r.o.
Ústecká 840/33, 405 33 Děčín 5
Czech Republic
DIČ CZ26759993
tel.: +420 412 706 222
www.kabelovna.cz

28.4.2017 ver. 6

J/A-DQH 8×1,7 max. 96F

This cable is suitable for blowing into tube.

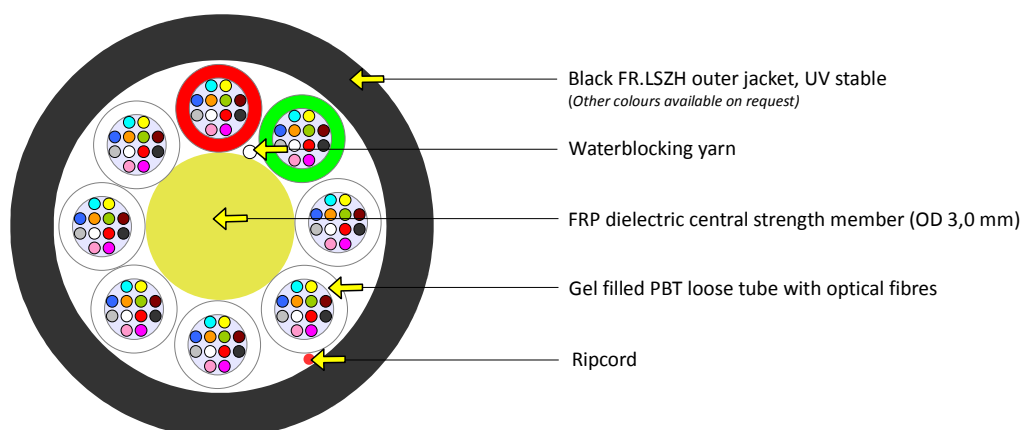

Mechanical and Environmental properties

Test	Value	Unit	Method
Cable outer diameter	8,4 ± 0,4	mm	EN 60811-203
Cable weight	84	kg/km	
Outer jacket thickness	1	mm	
Loose tube diameter	1,7	mm	
Max. tensile strength	2400	N	EN 60794-1-21-E1
Crush resistance test	1500	N	EN 60794-1-21-E3
Impact resistance test	15	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	15	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	20	× OD	EN 60794-1-21-E11b
Temperature range	Installation	-15 to +50	EN 60794-1-22-F1
	Operation	-40 to +70	
	Storage	-40 to +70	
Fire properties – Flammability	pass		EN60332-3-22 (cat.A)
Fire properties – Acid gases	pass		EN 60754-1
			EN 60754-2
Fire properties – Smoke density	pass		EN 61034-1, EN 60754-2

Cable life time - minimum 30 years

Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Fibre colour coding

According to IEC 60304

1	Red	7	Brown
2	Green	8	Violet
3	Blue	9	Turquoise
4	Yellow	10	Black
5	White	11	Orange
6	Grey	12	Pink

Other fibre colour sequences available on request

Tube colour coding

1	Red
2	Green
3 – 8	White

In the case of lower number of fibres some tubes are replaced by uncoloured fillers

Other tubes colour sequences available on request

Packing

Depending on ordered put-up lengths

