

Tactical Cable (HFFR)

ID: **5VA7**




KABELOVNA Děčín Podmokly s.r.o.
Ústecká 840/33, 405 33 Děčín 5
Czech Republic
DIČ CZ26759993
tel.: +420 412 706 222
www.kabelovna.cz

22.4.2016 ver.21

J/A-VQ(ZN)11Y max. 4F

This cable is suitable for indoor or outdoor use. The cable has good protection against chemicals, is resistant to abrasion.

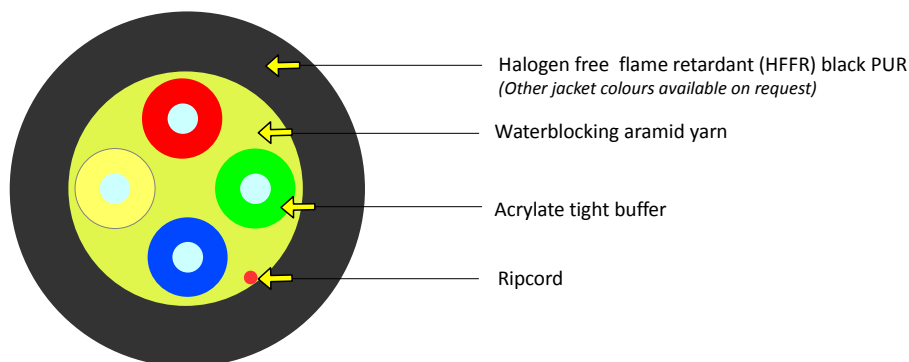

Order example

2100 m J/A-VQ(ZN)11Y 4E9/125G.657.A1 jacket colour BLK, tight buffer, cable specification 5VA7

Buffer

xxTx	Tight	strip. up to 10 cm
xxFx	Free	strip. more than 100 cm
Colour 1 st to 4 th	red, green, blue, yellow	(according to IEC 60304)
Material	Acrylate	

Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Fibre Type

Single mode fiber 9/125
Multi mode fiber 50/125
Multi mode fiber 62,5/125
See the Fibre Specification sheet

Packaging

Standard put-up length

Drum size

Plywood	2100 m *	600×300×390
	* ± 5 %, other lengths on request	

Tactical Cable (HFFR)

ID: **5VA7**



KABELOVNA Děčín Podmokly s.r.o.
 Ústecká 840/33, 405 33 Děčín 5
 Czech Republic
 DIČ CZ26759993
 tel.: +420 412 706 222
 www.kabelovna.cz

22.4.2016 ver.21

J/A-VQ(ZN)11Y max. 4F

Mechanical and Environmental properties

Test		Value	Unit	Method
Cable outer diameter	2F	4,5 ± 0,5	mm	EN 60811-1-1
	4F	5,0 ± 0,5		
Cable weight	2F	22	kg/km	
	4F	26		
Outer jacket thickness		1,2	mm	
Buffer diameter		0,9	mm	
Max. tensile strength		1400	N	EN 60794-1-21-E1
Crush resistance test		2000	N	EN 60794-1-21-E3
Impact resistance test		15	Nm	EN 60794-1-21-E4
Min. bend radius (no load)		25	mm	EN 60794-1-21-E11a
Min. bend radius (load)		20	mm	EN 60794-1-21-E11b
Temperature range	Installation Operation Storage	-15 to +50°C -40 to +85°C -40 to +85°C		EN 60794-1-22-F1

Cable life time - minimum 30 years

